

MK127 Setup Instruction mkey.com.au 10.02.2010

Thank you for purchasing the ATA remote replacement.




Since All ATA201, ATA208 and Firmadoor are obsolete, MK127 is a replacement. The replacement is not directly compatible with ATA transmitter. Please follow instructions to make it work on your garage door or gate. There are 2 methods to do it.

Method 1 : All ATA201.TXA-1, ATA208 transmitters have 12 DIP switches. The dipswitches up and down is the code. The easy way to set up just make code up and down in mirror reverse.


If dipswitch 1 in ATA is ON then switch dipswitch 12 ON in MK127. If dipswitch 2 in ATA is Off then switch dipswitch 11 Off in MK127. Do this for all dip switches in MK127.

Example: If the dipswitches in Old ATA remote: 1, 3, 7, 8, 9, 10, 11 ON

Then set New remote code in reverse as : 12, 10, 6, 5, 4, 3, 2 ON



Old ATA remote Dipswitches



New MK127 remote should be

Method 2: If you can find a code set button on the garage door opener or in gate control box. You can use 'CODE SET' to Learn the code you like to set. It is very simple as well.

Random set the code of the new remote first, in order to avoid same code with others.



Fig1. GDO2,GDO4 control panel

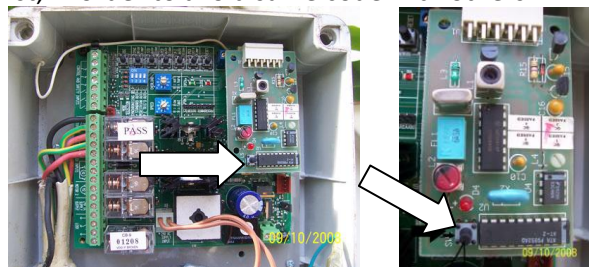


fig2. Gate control board

fig3. Receiver

1. Press and hold the blue CODE SET button on the opener (fig1) or SW (fig 3.) on the receiver board (the receiver board is usually in the gate control box. See fig2, 3).
2. Press the button on new transmitter for two seconds.
3. Release and pause for two seconds. Press the same button again for two seconds.
4. Release the CODE SET button on the opener or SW button on the receiver board.
5. Now you can press the button to test operation of the garage door or the gate.