
MK901/902L Receiver
Installation & Remote Programming


This kit is supplied pre-programmed and ready to use. The programming steps below are only needed if you add a remote in the future.

Installation

1. Switch off the power to the door opener.
2. Connect the two yellow wires at the end of the receiver's black cable to the two screws on the back of the M2500L door opener, as shown in the wiring diagram.
3. Secure the receiver nearby using the supplied cable tie.
4. Plug the supplied power adaptor into a nearby power point, then switch on the power to both the adaptor and the door opener.
5. Test the remotes supplied with your conversion kit.

If no spare power point is available, use a suitable double adaptor.

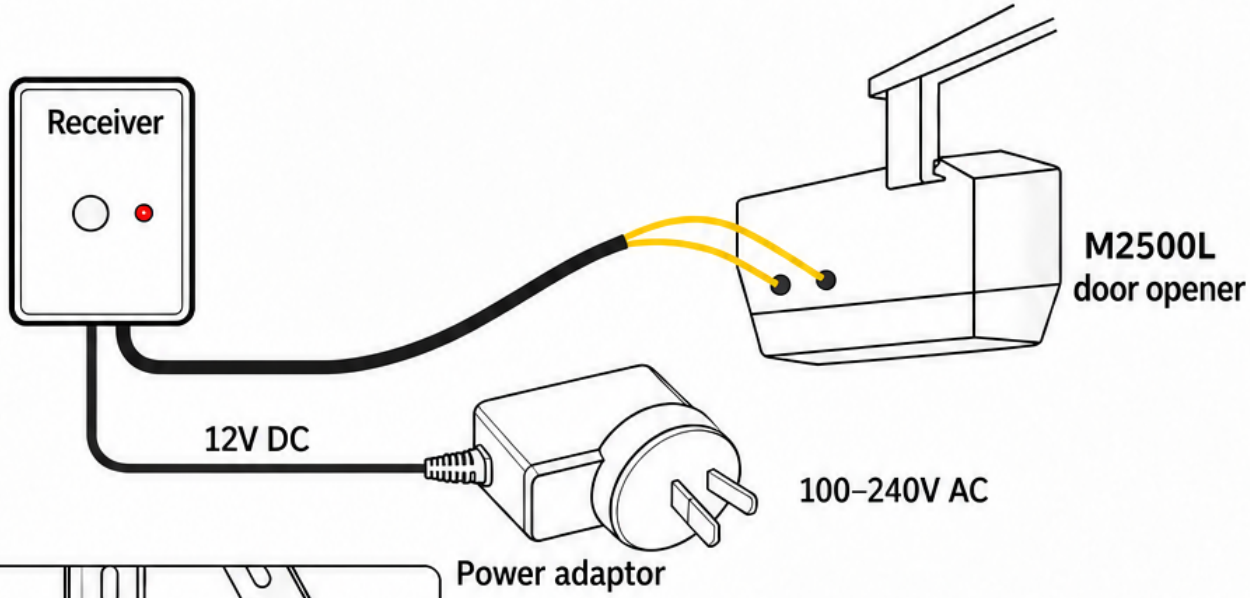

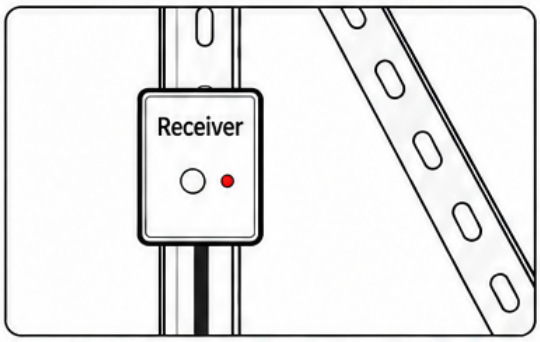

Example mounting position

Adding a Remote

1. Press the LEARN button on the receiver once. The LED will turn on.
2. Press the remote button you want to use to operate the door. The LED will turn off.
3. Press the same remote button again. The LED will flash.
4. When the LED stops flashing, programming is complete.