


To Connect Receiver to a MPC1

 **NOTE: Disconnect electric power to the opener before removing covers.**

- Cut away the section at the top of the B&D MPC1 Wall Control to expose the J2 connector.
- Attach the Receiver case onto the side of the Wall Control at a convenient position so as to allow full operation of the Opener, and also enable programming the receiver. (i.e. within length of the cable supplied.)
- Connect the Wiring Cable Harness to the J2 connector on the Wall Control and to the Receiver box.
- Restore power to the opener and connect Power Pack to receiver terminal.

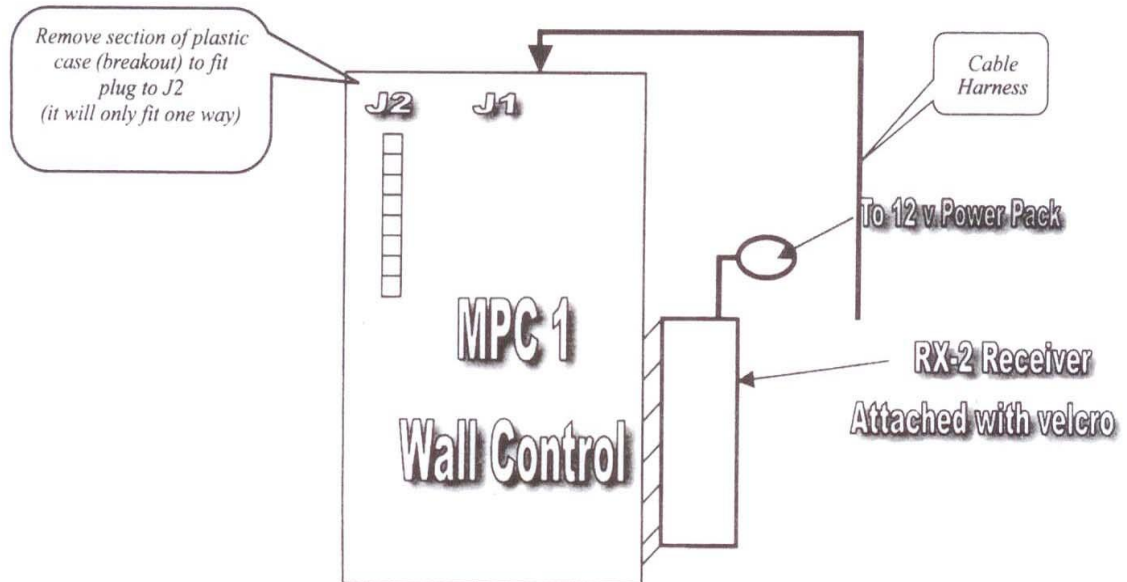

Storing Transmitter Coding (Note: This unit has been pre-coded, below is for future need)

1. Press LEARN button on Receiver once, the Signal LED will be on
2. Press one button of the transmitter (whichever one you want to control the door), Signal LED will be off
3. Press the same button of the remote again, LED will be flashing

When the LED stops flashing, the coding sequence is complete.

Delete coding

Press and hold LEARN button on the receiver for about 10 sec, all the coding are removed