


Three-Wire Receiver Connection

Insert the three receiver wires into the square terminal openings as shown below.

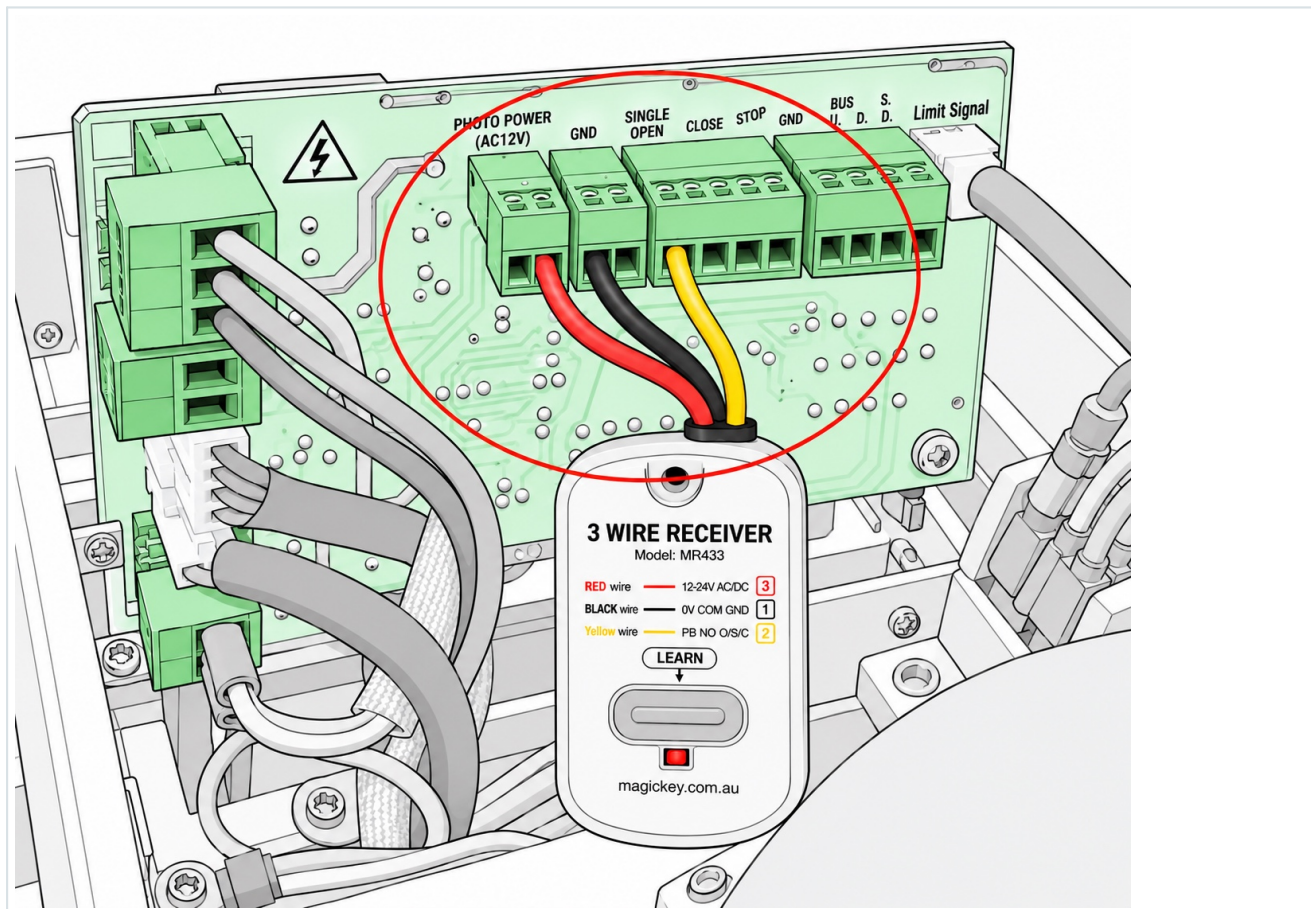

WIRE	CONNECT TO	FUNCTION
RED	PHOTO POWER (AC12V)	Receiver power input
BLACK	GND	Common / ground
YELLOW	SINGLE OPEN	Open trigger input

Installation steps

1. Isolate power before opening the controller enclosure.
2. Loosen the terminal screws from the top of the green connector blocks.
3. Insert the stripped wire ends into the front square openings: red, black and yellow as listed above.
4. Tighten the terminal screws and gently pull each wire to confirm it is secure.
5. Mount the receiver clear of moving parts, restore power and test both remotes.

Safety: This guide is a connection reference only. Terminal names and controller wiring can vary. Installation should be completed or verified by a qualified technician. If the labels on your control board differ from those shown, stop and consult the controller manufacturer.