


MK301/302 Instruction(for ACDC door opener)

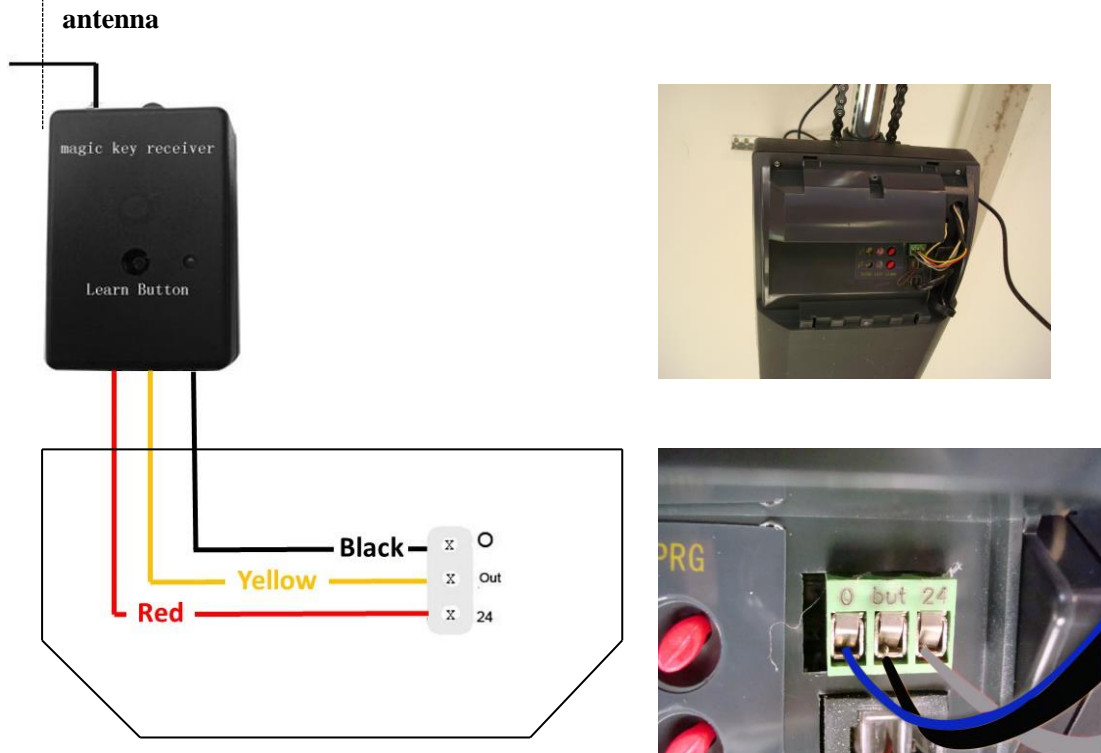

Connection Guide for Dominator Garage Door Auto Opener

1. Switch power off
2. Connect wire black to OUT
Connect wire blue to O
Connect wire brown to 24
3. Switch power on and the LED will be illuminating
4. You can test to operate your garage door now.

Storing Transmitter Coding (Note: This unit has been pre-coded before send for quality testing)

1. Press LEARN button on Receiver once, the Signal LED will be on
2. Press one button of the transmitter (which ever one you want to control the door), Signal LED will be off
3. Press the same button of the remote again, LED will be flashing
When the LED stops flashing, the coding sequence is complete.

Delete coding

Press and hold LEARN button on the receiver for about 10 sec, all the coding are removed.